




DFRA series

desiccant air dehumidifiers





DFRA Description

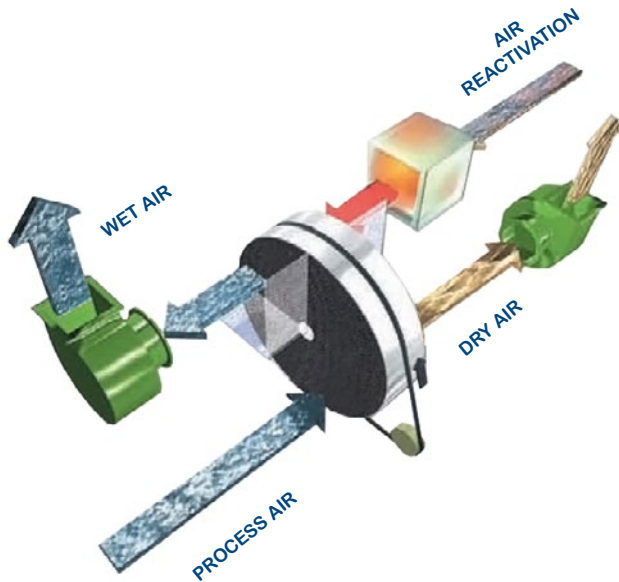

The foolproof operation of our DFRA series dehumidifiers is based on the principle of two continuous and simultaneous airflows running in opposite directions through the desiccant rotor: the process airflow (airflow requiring dehumidification) and the reactivation airflow for the desiccant rotor (wet air). After filtration, the process airflow passes through the desiccant rotor, which adsorbs most of the water vapour contained in the air stream.

This is then expelled from the dehumidifier via a fan, in the form of dry air for supply to the process ventilation system or direct to the space in question. The reactivation airflow for the desiccant rotor is drawn from outside, filtered and heated by electricity/steam/thermal oil, or via a direct combustion natural gas burner. When it has reached the temperature required to carry over the molecules of water vapour retained in the rotor, this wet air is extracted from the dehumidifier by a fan and expelled to the outside. Our dehumidifiers are specially designed for easy installation, stable and continuous operation with minimum maintenance.

Using the latest technology, the operating principle of FISAIR desiccant air dehumidifiers is based on the use of an exclusive, high performance, desiccant silica gel rotor to retain the water vapour.



The effective dehumidification of the process airflow is achieved by the high efficiency of the desiccant silica gel rotor which adsorbs molecules of water vapour, maintaining its performance even at low levels of ambient humidity. The synthesized silica gel is a chemically and thermally stable material, which is not subject to deliquescence like other desiccant materials and therefore provides continuous and stable performance. This silica gel is the foundation for the long service life provided by FISAIR dehumidifiers, as its chemical resistance plus its ability to be washed with water, ensures its longevity. Process air humidity values down to -20°C Dew Point can be readily achieved, and even more demanding levels are available on request.



DFRA Typical applications



MANUFACTURING PROCESSES

Pharmaceuticals, plastics and polymers, textiles, chemicals...



PRODUCT DRYING

Sausages and ham, cheese, sweets, chocolate, food powders, photographic paper...



CORROSION PREVENTION

Cars, ships, power and water pumping stations, defense equipment, electronic material...



STORAGE

Dry air stores, paper and wood, indoor swimming pools, museums and libraries, bulk material silos...



TEMPORARY DRYING

Building works, paintwork, flood water damage limitation...


Our wide range of dehumidifiers provides solutions for industry and any applications where excess humidity is a problem.

| Model | Dry air flow | Aviabile external pressure | Wet air flow | Aviabile pressure | Heater power | Total power | Dehumidification capacity (*) | Overall dimensions (mm) | | | Weight |
|-------------|--------------|----------------------------|--------------|-------------------|--------------|-------------|-------------------------------|-------------------------|-----------|------------|--------|
| | (m³/h) | (Pa) | (m³/h) | (Pa) | (kW) | (kW) | (kg/h) | Length (A) | Width (B) | Height (C) | (kg) |
| DFRA-0065-E | 450 | 300 | 135 | 200 | 4,5 | 5,6 | 3 | 1560 | 680 | 945 | 152 |
| DFRA-0100-E | 700 | 150 | 210 | 100 | 6,8 | 8,1 | 4 | 1623 | 685 | 945 | 164 |
| DFRA-0130-E | 900 | 550 | 270 | 250 | 9 | 10 | 6,1 | 1635 | 780 | 1025 | 175 |
| DFRA-0160-E | 1100 | 450 | 330 | 125 | 11,3 | 12,3 | 7,8 | 1635 | 780 | 1025 | 185 |
| DFRA-0175-E | 1200 | 400 | 360 | 300 | 13,5 | 14,6 | 9,1 | 1675 | 780 | 1025 | 185 |
| DFRA-0200-E | 1400 | 600 | 420 | 250 | 15,8 | 17,3 | 10,4 | 1650 | 800 | 1025 | 190 |
| DFRA-0230-E | 1600 | 500 | 480 | 350 | 18 | 19,9 | 11,7 | 1715 | 820 | 1025 | 200 |
| DFRA-0300-E | 2100 | 750 | 630 | 600 | 22,5 | 25,8 | 14,3 | 1785 | 875 | 1025 | 230 |
| DFRA-0400-E | 2700 | 700 | 810 | 400 | 27 | 30,8 | 18,8 | 1839 | 980 | 1265 | 352 |
| DFRA-0500-E | 3600 | 200 | 1080 | 550 | 36 | 39,3 | 24,6 | 1875 | 1070 | 1265 | 385 |
| DFRA-0650-E | 4500 | 450 | 1350 | 500 | 45 | 49,2 | 29,7 | 2020 | 1305 | 1525 | 520 |
| DFRA-0900-E | 6000 | 600 | 1800 | 650 | 63 | 70,8 | 41 | 2160 | 1425 | 1525 | 565 |
| DFRA-1100-E | 7500 | 450 | 2250 | 800 | 81 | 90,8 | 52,2 | 2204 | 1600 | 1865 | 725 |
| DFRA-1300-E | 9000 | 300 | 2700 | 650 | 99 | 109,6 | 64,8 | 2336 | 1575 | 1865 | 760 |
| DFRA-1700-E | 12000 | 1000 | 3600 | 350 | 126 | 144,1 | 85 | 2725 | 1950 | 1980 | 1025 |
| DFRA-2100-E | 15000 | 900 | 4500 | 250 | 162 | 181,1 | 106,2 | 2748 | 2095 | 1980 | 1175 |
| DFRA-2900-E | 20000 | 750 | 6000 | 350 | 200 | 215,1 | 136,8 | 3072 | 2400 | 2525 | 1870 |
| DFRA-3500-E | 24000 | 250 | 7200 | 200 | 240 | 258,6 | 161,2 | 3110 | 2400 | 2525 | 1970 |

- (*)
- Nominal drying capacity (Wn) for process and reactivation air inlet conditions: 20° C & 60% RH. For different ones, please check specific model technical data sheet.
 - Units efficiency under nominal reactivation built-in heater power.
 - Technical data are subject to change without prior notice.
 - Overall dimensions, weight and total power for electric heater reactivation. For steam coil or gas burner, please consult.
 - Control voltage 24 VAC



DFRA Main component

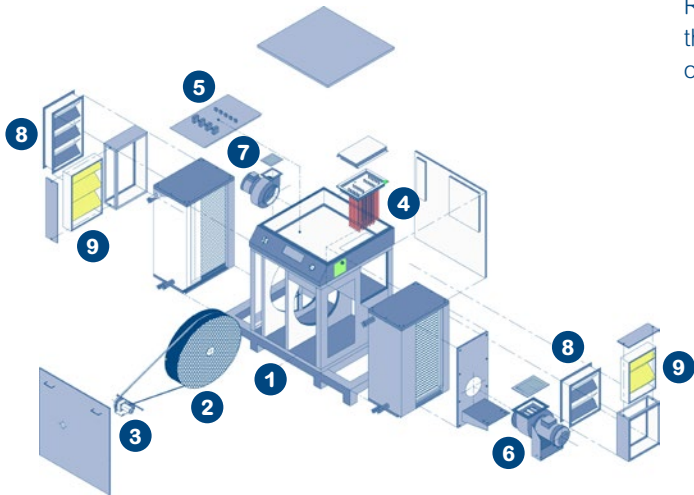

Rugged, galvanized steel construction with an enamel finish, the basic design of our dehumidifiers comprises the following components:

1. Basic module
2. Desiccant silica gel rotor
3. Desiccant rotor drive system.
4. Reactivation air heater.
5. Electric panel with associated protection.
6. Dry air fan.
7. Wet air fan.
8. Air dampers.
9. Air filters.

OPTIONS

- Stainless steel construction.
- Higher capacity compact units.
- Higher efficiency air filters (G4 supplied as standard).
- Integral pre/post cooling coils for chilled water or gas.
- Modulating control for electric heater or control valve for steam heater/natural gas burner, suitable for a 0-10V DC external control signal.
- Electronic controller on front panel.
- Differential pressure switch with clogged filter alarm.
- Stopped rotor alarm.
- Remote signal card for 4/8 Volt free contacts.